

JAF-1 Liquid Stop



APPLICATION

- For extractive gas analysis
- For emission and process monitoring
- For analyser protection
- Reliable prevention of liquid breakthrough to the analyser
- For installation upstream gas analysers

BENEFITS

- Separates reliably sample gas from liquids and dust
- No liquid breakthrough possible
- Separation of residual dust e.g. after a change of the dust filter element in a gas analysis system
- Easy mounting and integration in gas analysis systems
- Alerting by upstream flow monitoring
- Corrosion resistant
- Gas tight

FEATURES

- Semipermeable membrane with fluor polymer coating
- Fine filter with 0,1 μm
- Low dead volume
- Low pressure drop
- Low dimensions
- Suitable for high ambient temperatures
- Variable connection technology
- Gas flow is interrupted with completely wet membrane



JCT

Analysentechnik
GmbH

Gas Sampling Probes

Heated Sample Lines

Sample Gas Coolers

Condensate
Treatment

Accessories

Gas Conditioning
Systems


Sample Gas
Converters



TECHNICAL DATA

Model	JAF-1
Description	Liquid stop for analyser protection
Operation	
Flow	max. 400 NI/hr
Operating temperature	0...80°C
Operating pressure	max. 3 bara
Pressure drop at 100 / 400 NI/hr air	10 / 40 mbar
Construction	
Dimensions over all (Ø x L)	70 x 120 mm (with hose fittings)
Connections inlet / outlet	NPT 1/8" male or hose fitting DN 4/6 mm
Gas wetted materials	PTFE, PP, Fluor Polymer
Dead volume	approx. 5 ml
Filter porosity / filter surface	0,1 µm / 20 cm ²
Approvals / signs	CE

DIMENSIONS

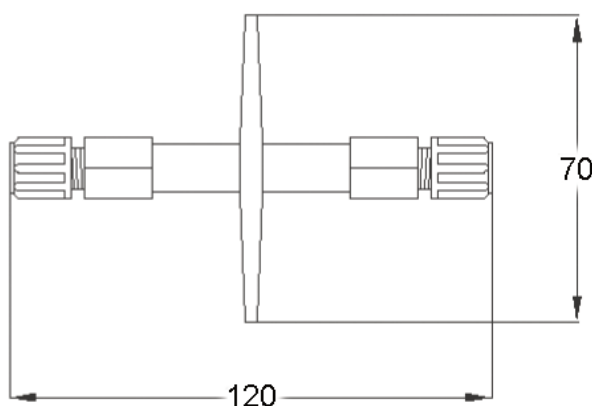

Dimensions in mm

ORDER CODES

Order code	Description
36.00300	JAF-1 liquid stop with 2 hose fittings DN 4/6 mm out of PP
36.00301	JAF-1 liquid stop with 2 connection threads NPT 1/8" male

JCT Analysetechnik GmbH

Werner Heisenberg-Straße 4 A-2700 Wiener Neustadt
Tel. +43 (0) 2622 / 87201 Fax +43 (0) 2622 / 872011
E-Mail: sales@jct.at Web: www.jct.at

