

JCL-301 Compact Gas Conditioning System



JCT

Analysentechnik
GmbH

Gas Sampling Probes

Heated Sample Lines

Sample Gas Coolers

Condensate
Treatment

Accessories

Gas Conditioning
Systems

Sample Gas
Converters

APPLICATION

- For extractive gas analysis
- For emission and process monitoring
- Continuous sample gas conditioning of humid process gases
- Continuous drying of sample gas to a precise low and constant outlet dew point
- Minimises water vapour cross sensitivities and volumetric errors

BENEFITS

- Complete solution for a great number of applications
- Longterm reliable reproducible measuring results
- Optimum operational safety due to self-monitoring
- Extremely precise long term stable dew point even under varying loads
- Fast response time due to low dead volume
- Very low dissolution rates
- Continuous condensate removal
- Low maintenance operation
- Easy to maintain design

FEATURES

- Individual configuration due to various expansion options
- Basic device with high-performance compressor sample gas cooler
- 1 or 2 independant sample gas paths
- Integrated condensate pumps
- Speed-controlled fan
- Connections for external sample gas pump
- 11 status-LED's with event memory
- 2 status contacts
- Additional options:
 - Easy to maintain robust fine dust filter
 - Corrosion resistant flowmeter with precise needle valve
 - Reliable condensate monitoring
 - Acid dosing pump
 - RS 485 interface

MADE IN AUSTRIA



TECHNICAL DATA

Model

JCL-301

Description	compact gas conditioning system
Cooling principle	compressor cooling with hot bypass technology
Number of gas paths	1 - 2

Operation

Flow rate*	max. 120 l/hr
Gas temperature inlet*	max. +140°C
Dew point inlet*	max. +80°C
Dew point outlet	+3°C
Dew point stability (for constant inlet conditions)	±0,1K
Ambient temperature	+5...+45 °C
Operating pressure	0,2...2,2 bara
Ready for operation	< 10 min
Pressure drop at max. flow rate	2 mbar

Construction



Dimensions over all (W x H x D)	320 x 310 x 328 mm
Installation	stand alone or wall mounting
Operating position	horizontal
Weight	approx. 22 kg
Housing, colour	sheet steel 1,5 mm, powder coated, RAL 1016 S
Material heat exchanger	PVDF
Dead volume per gas path	48 ml
Connection sample gas / condensate outlet	PVDF hose fitting DN 4/6 mm
Approvals / signs	CE

Electrics

Power supply	220....240 VAC 50/60 Hz or 100....115 VAC 50/60 Hz
Power consumption (depending on load, ambient temperature and configuration)	200...345 VA
Connection power / status signal	3 x connector EN175301-803 form A/B with PG 9 - panduit, 3/4 pole
Fusing	external on installation site, fuse characteristic C: 230 VAC 6 A; 115 VAC 10 A
Protection class	IP 20 (EN 60529)
On - time	100 %
Alarm set points	<0 / >+10°C
Status relay	1 volt free changeover contact
Pump relay	1 volt free contact NC
Switching capacity relays	max. 250 VAC / 8 A(1,5 A at 250 VDC); min. 5 VADC 5 mA
Data interface (option)	DB 9-female
Interface protocol (option)	RS 485 / ST Bus
Bus cable length max.	1000 m


* Results from the effective cooling capacity at 25°C ambient temperature and 3°C outlet dew point and can be influenced by further operational parameters

DIMENSIONS

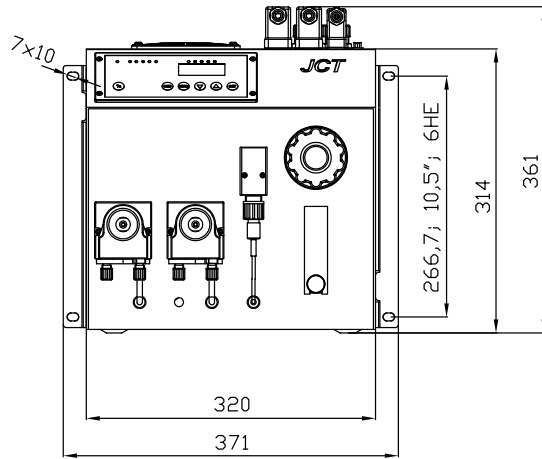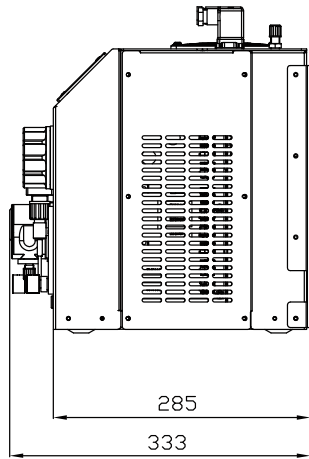


Dimensions in mm


APPLICATION EXAMPLES / GAS FLOW DIAGRAMS

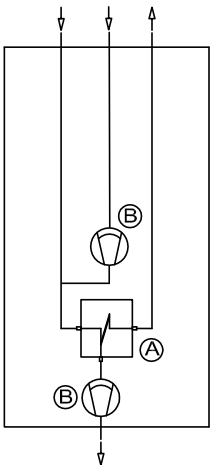


Part No.: JCL-301.2130000

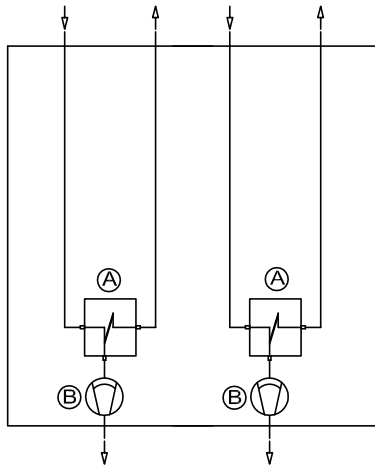


Part No.: JCL-301.2220000

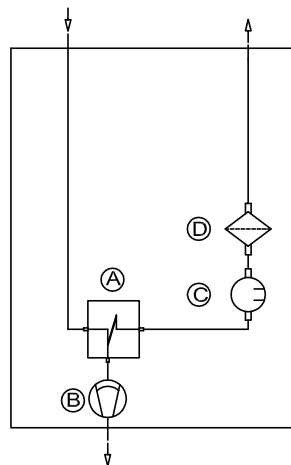

Part No.: JCL-301.2111100

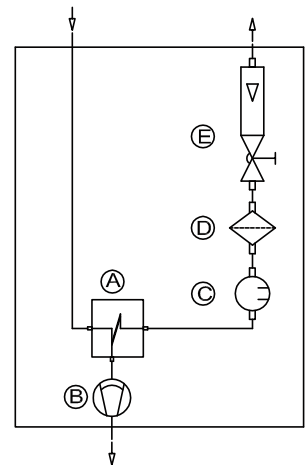

Part No.: JCL-301.2111110

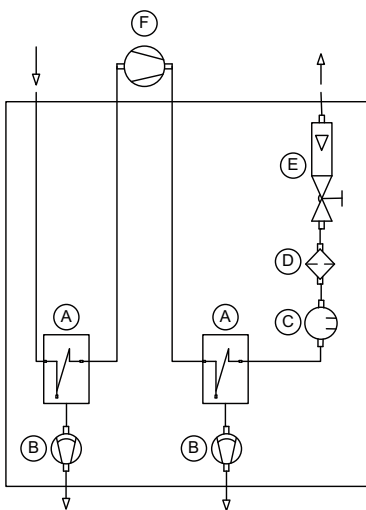

JCL-301 fully equipped Part No.: JCL-301.2221110

A	Gas heat exchanger
B	Condensate pump / dosing pump
C	Condensate sensor

D	Fine dust filter
E	Flow meter with needle valve
F	External sample gas pump (not included, suitable sample pumps are to be found in chapter 5)

ORDER CODES

JCL-301

Power supply		115 VAC 50/60 Hz	1																			
		230 VAC 50/60 Hz	2																			
Gas heat exchangers	A	1 Gas heat exchanger		1																		
		2 Gas heat exchangers		2																		
Condensate pumps	B	1 Condensate pumps JSR-25																				
		2 Condensate pumps JSR-25																				
		1 Dosing pump JSR-25 + 1 condensate pump																				
Fine dust filter	D	Without fine dust filter																		0		
		1 Fine dust filter JF-1 incl. PTFE-filter element																			1	
Condensate detectors	C	Without condensate detectors																			0	
		1 Condensate detector KW-2																				1
Flow meter with needle valve	E	Without flow meter																			0	
		1 Flow meter 10....100 NI/hr																				1
Option		Without additional option																				0
		JCT VISU-system software, remote control, RS485 interface																				

Order code

JCL-301.



Some possible combinations of options are technically futile and therefore not available. Please ask the JCT sales team for advice.

JCT Analysetechnik GmbH

Werner Heisenberg-Straße 4 A-2700 Wiener Neustadt
 Tel. +43 (0) 2622 / 87201 Fax +43 (0) 2622 / 872011
 E-Mail: sales@jct.at Web: www.jct.at

