




# HL Series

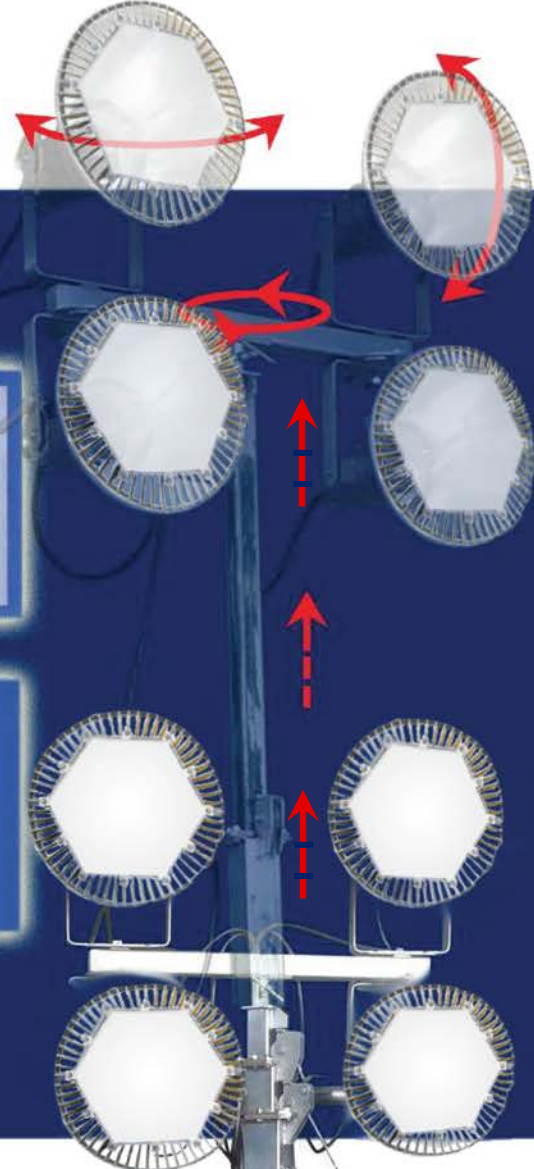

**Lumens: 49,600 to 80,000**

**Features:-**

- High Spec, structure & large radius tires easy to move on uneven road surface even at site construction.
- Extra front outrigger flexible to fixing level adjustment.
- High demand for simple & solid fabricate to match every fieldwork.
- 4 unit of On / Off switch for individual lamp.
- 1 unit of industrial socket outlet, 3 pin, 16 Amp (built-in MCB & ELCB).

|                              |                              |   |          |
|------------------------------|------------------------------|---|----------|
| <b>Generator</b>             | Maximum Output A.C. (W)      | 5000  |          |
|                              | Rated Output A.C. (W)        | 4500  |          |
|                              | Rated Voltage A.C. (V)       | 230V  |          |
|                              | Rated Current A.C. (A)       | 18.3  |          |
|                              | Power Factor (%)             | 100   |          |
|                              | Phase                        | Single Phase  |          |
|                              | Frequency (Hz)               | 50  |          |
| <b>Engine</b>                | Speed R.P.M.                 | 3000  |          |
|                              | Model                        | KM 186FAG   |          |
|                              | Rated Output PS R.P.M.       | 8.6,3600  |          |
|                              | Battery                      | NS40  |          |
|                              | Start System                 | Electric  |          |
|                              | Type                         | Air Cooled  |          |
|                              | <b>Lighting</b>              | Type  | LED      |
| Color                        |                              | Cool White  |          |
| Maximum Height               |                              | 4 Meter Manual  |          |
| <b>HL-ML-4/140/LUXEON/HM</b> |                              | <b>4 units lamp x 140 watt (49,600 lumens)</b>  |          |
| <b>Model</b>                 | Warranty                     | 1 year performance warranty   |          |
|                              | Features                     | Significantly reduced glare Instant On / Off<br>Maintenance Free<br>Resistant to shock & Vibration<br>Energy saving |          |
|                              | <b>HL-ML-4/200/HM/HL-200</b> | <b>4 units lamp x 200 watt (80,000 lumens)</b>  |          |
|                              | Warranty                     | 2 years warranty  |          |
|                              | Features                     | Instant On / Off<br>Maintenance Free<br>Resistant to shock & Vibration<br>Energy saving                             |          |
|                              | <b>Dimension</b>             | 1497 (L) x 965 (W) x 4267 (H)mm   | Lifted   |
|                              |                              | 1497 (L) x 965 (W) x 4267 (H)mm   | Standard |
| <b>Weight</b>                | Whole Unit                   | 300kg   |          |



**Hitch Mount Slides Over 2" x 2" Draw Bars. (Utility Vehicle Application)**

**For any further information, please feel free to contact us:**

**TTOP**

**TTOP Industrial & Engineering Sdn. Bhd.** (841808-K)  
 B-624, Jalan Besar, 25300 Kuantan, Pahang, MALAYSIA.  
 Tel: +609-566 2821 ; Fax: +609-566 2822  
 Email: [top.sb@gmail.com](mailto:top.sb@gmail.com) / [sales@ttop.com.my](mailto:sales@ttop.com.my)  
 Website: [www.ttop.com.my](http://www.ttop.com.my)